



Digta 4015 DS

Digital technology – portable and easy to use



Digta 4015 DS Set Digta 4015 DS


Improved efficiency in your hands:

The Digta 4015 DS brings together all the benefits of digital speech processing – including easy operation. With a special plus for the professional user: The internal 512 MB memory means voice recordings up to 80 hours are now possible. And the Digta Station 441 can charge the onboard Grundig rechargeable batteries immediately. Enjoy using the latest in digital speech processing.

- Premium digital hand dictation machine – uniquely available with 512 MB of permanent memory and an MMC/SD interface
- Indexed storage of dictations in up to seven directories, e.g. according to subject
- Real-time clock function for time stamping dictations
- Instructions to the typist, indexing and priority
- Easy data communication with DSS-Mover, using the docking station Digta Station 441
- Plug-in option for Digta Scan 404 bar code reader or Digta RFID 414 RFID reader
- Software DigtaSoft One/DigtaSoft included




Can be combined with the Digta Station for battery charging ...




and a foot control for hands-free dictation.

Digta 4015 DS

Controls

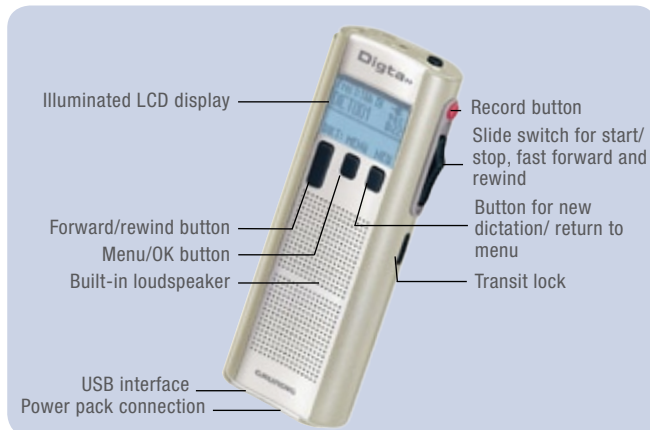

Display

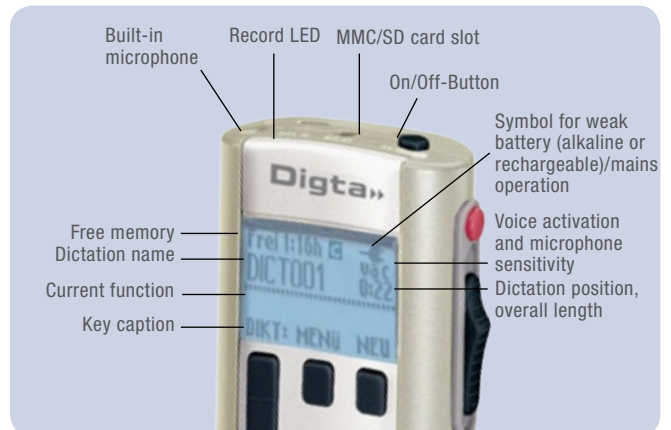

Function/equipments

Storage medium/file	Internal memory 512 MB, 1 DSS directory, 3 subdirectories A-C, with management package: 6 subdirectories A-F, optional Digta Card
Display	Illuminated full graphic display, 4 lines, up to 16 characters per line, record LED
File name	4 characters of the author's name + 3 digit sequential number
Record/playback operation, fast forward, rewind	4 function slide switch and record button
Variable playback speed	Switchable to 1.5x approx.
Key lock	Hold slide switch
Function keys	On / off / PC, forward / back button and 2 function keys, captions in lowest display line
Editing functions	New dictation, insert in dictation, insert information / index (with management package), delete dictation, delete part dictation, delete information / index (with management package), skip function (dictation selection with forward / back button)
Clock	Time stamp in dictations showing status "created" and "dictated"
Menu functions	Dictation status, directory selection, 10 typists, 10 dictation types, 10 groups, number / character, format memory, voice activation, microphone sensitivity dictation / conference, PC microphone operation, automatic shut-down, display illumination, set time/date, switch off tones, reset dictation counter, display software version, return to factory settings, select display language (D, GB, F, E, I, NL, DK, S, N) With management package: Status „reset“, priority optional: transcription station operation
Dictation accompanying information: 10 typists, 10 dictation types, 10 groups, number / character, max. priority, 3 authors (optional)	Can be edited on the PC and up loaded into the machine
Acoustic signals	Standby after switching on, information / index, weak battery / rechargeable, full memory
Charging battery in the device	High speed charging of 462 rechargeable battery with 473 power supply/charger unit (approx. 3 hr.)
DigtaSoft One/DigtaSoft	PC software for the easy recording, transfer, processing and sending of dictations on DigtaSoft networks up to a maximum of 10 users. Configuration of dictation machine.

Technical data

Storage medium	Internal memory 128 MB with up to 80 hrs. MMC/SD slot for Digta Card
File format	DSS, standard play
Memory requirement	Approx. 1 MB for 10 min. speech
Data rate	Approx. 13.6 kbit/s
Frequency response	300-5500 cycles per second (speech recognition suited)
Max. power output	140 mW
Loudspeaker	1.1 inch. (28 mm) in diameter
Microphone socket	0.14 inch. (3.5 mm) jack
Earphone socket	0.14 inch (3.5 mm) jack, mono (stereo phones can be used), max. output limited to 60 mV, earphone impedance min. 32 ohms
PC interface	USB 1.1
Batteries	2 x AA (Mignon), 1.5 V
Power pack connection	0.1 inch. (2.5 mm) jack, 3 V DC, 350 mA
Temperature for storage	-20°C to +70°C
Temperature for operation	-15°C to +35°C
Dimensions (not including protruding controls)	Length approx. 5.2 inch. (132 mm), width approx. 1.97 inch. (50 mm), depth approx. 0.91 inch. (23 mm)
Weight	Approx. 5.11 ounce (145 g), including batteries and Digta Card
Case	High-quality ABS plastic, Corona Silver colour
System requirements for DigtaSoft and DigtaSoft Pro	WIN 2000/XP/Vista recommended, WIN 7, MAPI compatible mail system.(e.g. Microsoft Outlook), USB 1.1/2.0

Accessories included

Digta 4015 DS	USB cable, batteries, CD with PC software, pouch
Digta 4015 DS Set	as above plus Digta Station 441, 462 rechargeable battery, 473 mains unit, management package

Optional accessories

DigtaSoft Pro	473 power supply/charger unit (for mains operation and rapid charging), 462 rechargeable battery (2 NiMH rechargeable batteries), 3 author function, management package, transcription station operation, Digta Scan 404 bar code reader, Digta RFID 414 RFID reader, Digta Station 441, foot control 536, hand control 541, Digta Earphone 951, Digta DirectMic 941, Digta ConfMic 945, USB Hirose short cable, audiocable (mono), Digta Case 721, Digta Card
DigtaSoft Pro	PC software with additional features like extended memory and export functions, comfort settings for player, a reporting tool and others. DigtaSoft Pro is also suitable for larger DigtaSoft networks. An update from DigtaSoft is possible at any time.